

FIG. 1

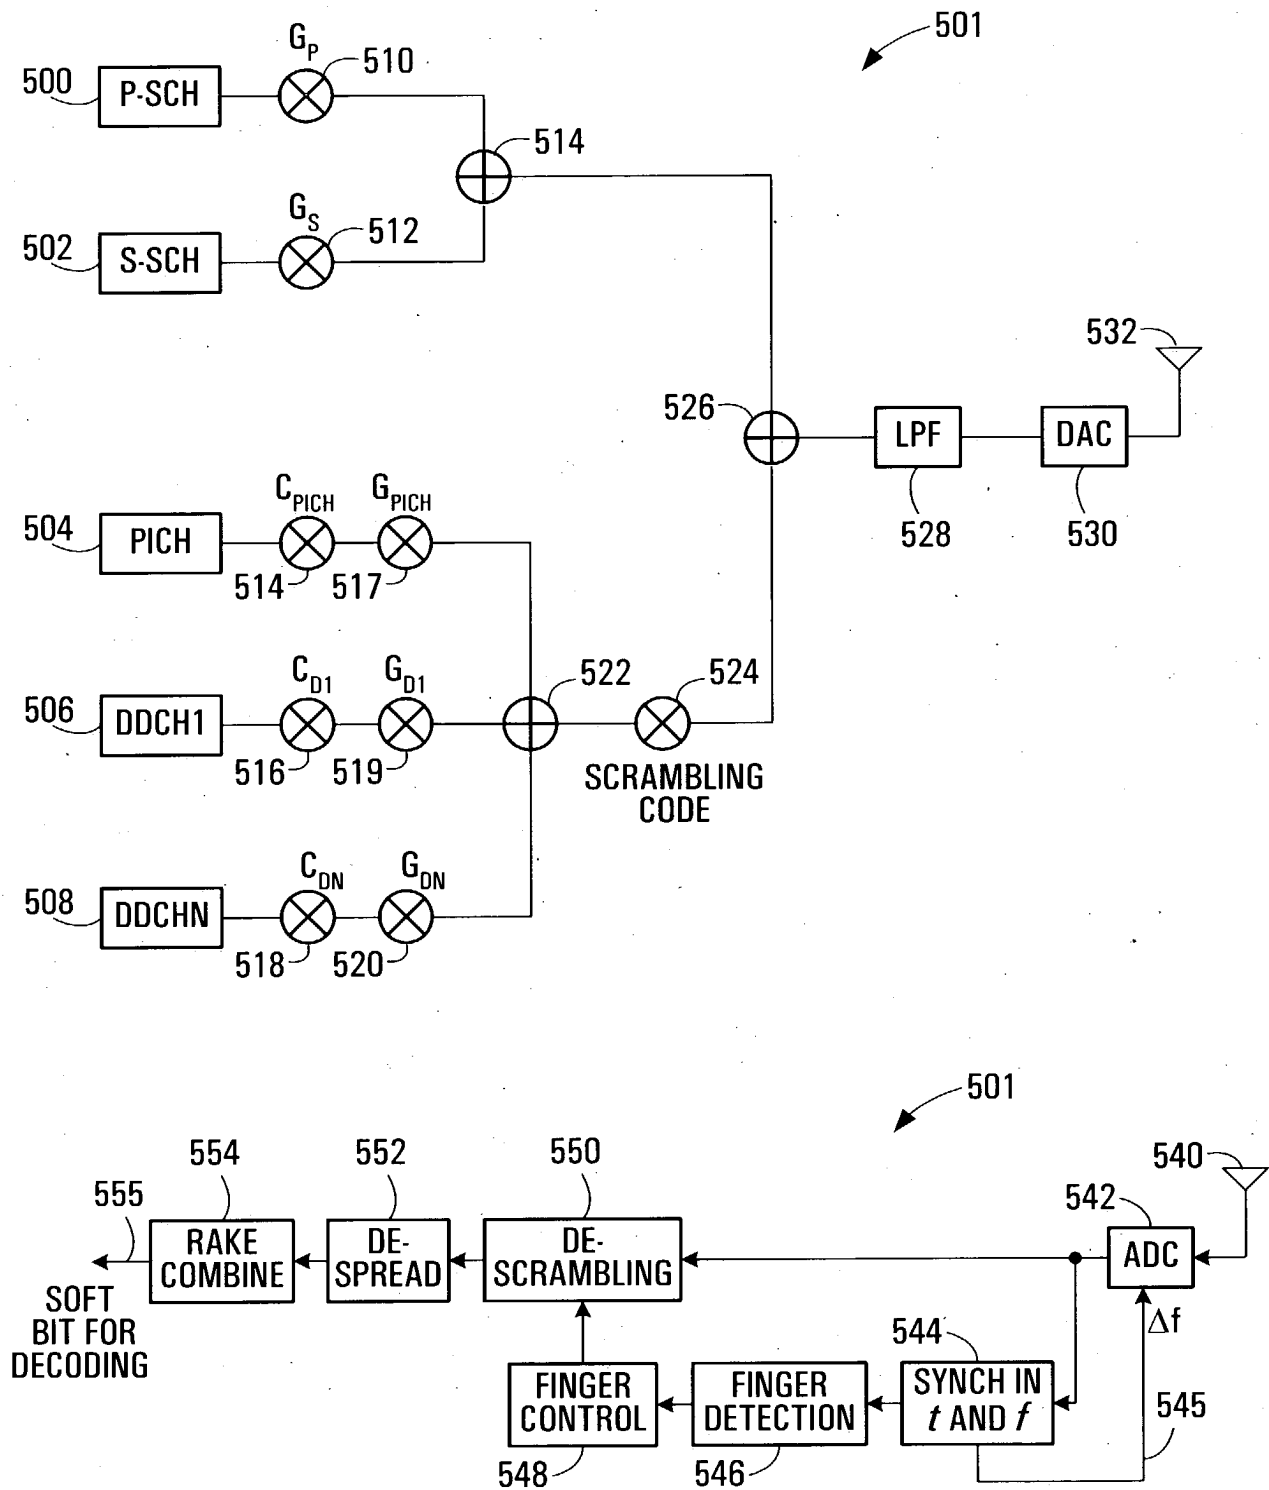


FIG. 2

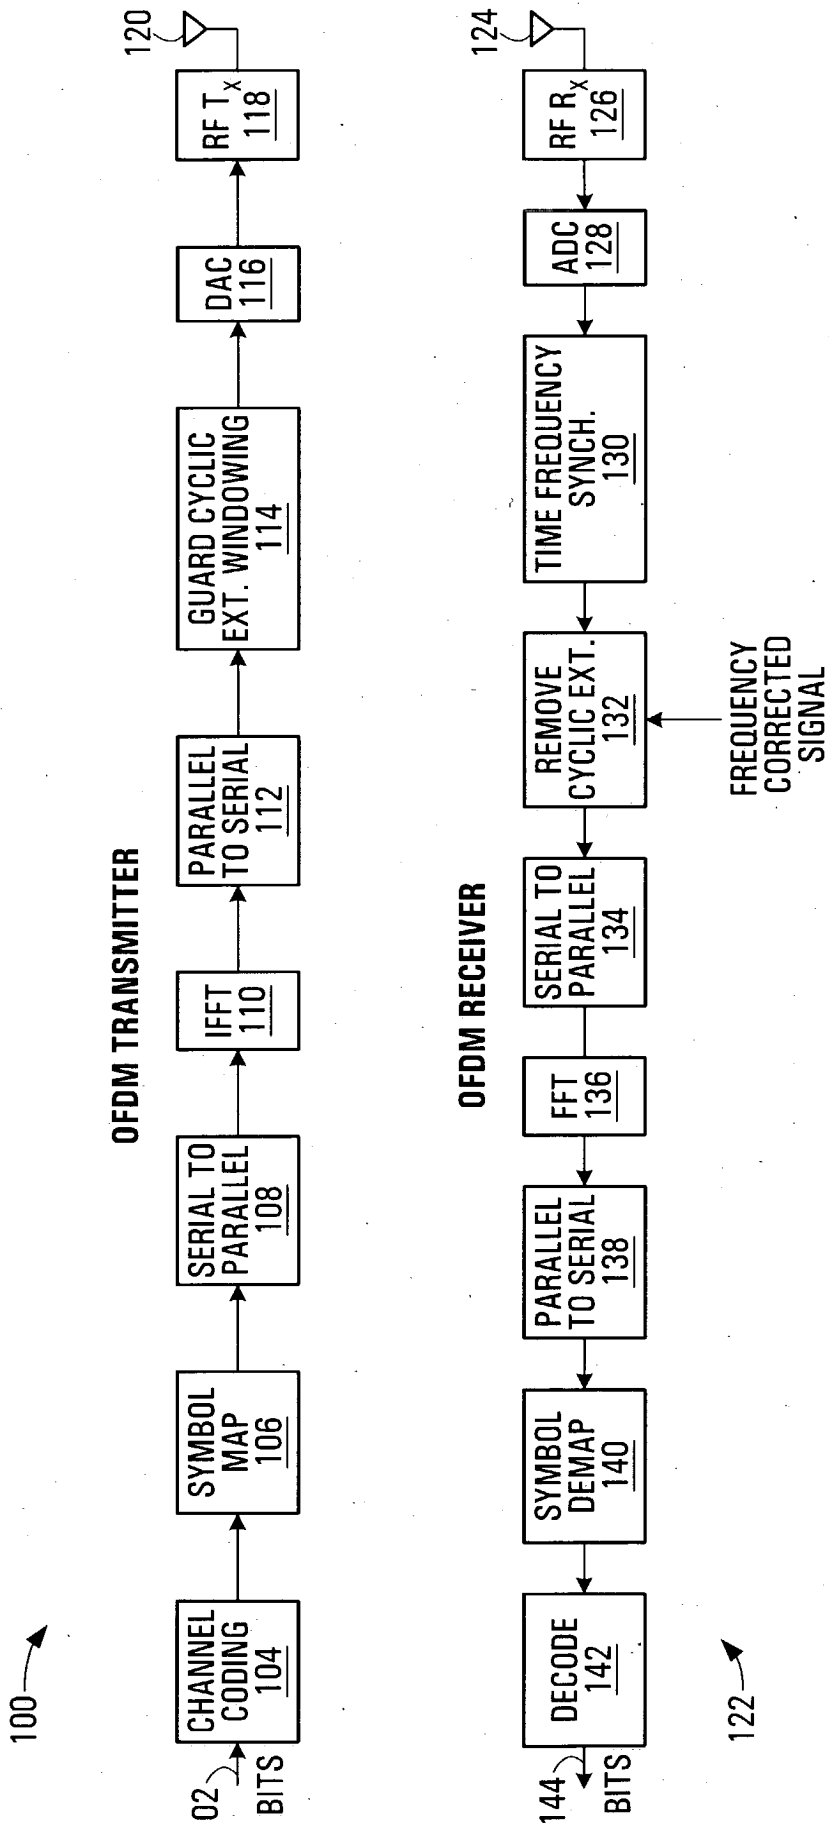


FIG. 3

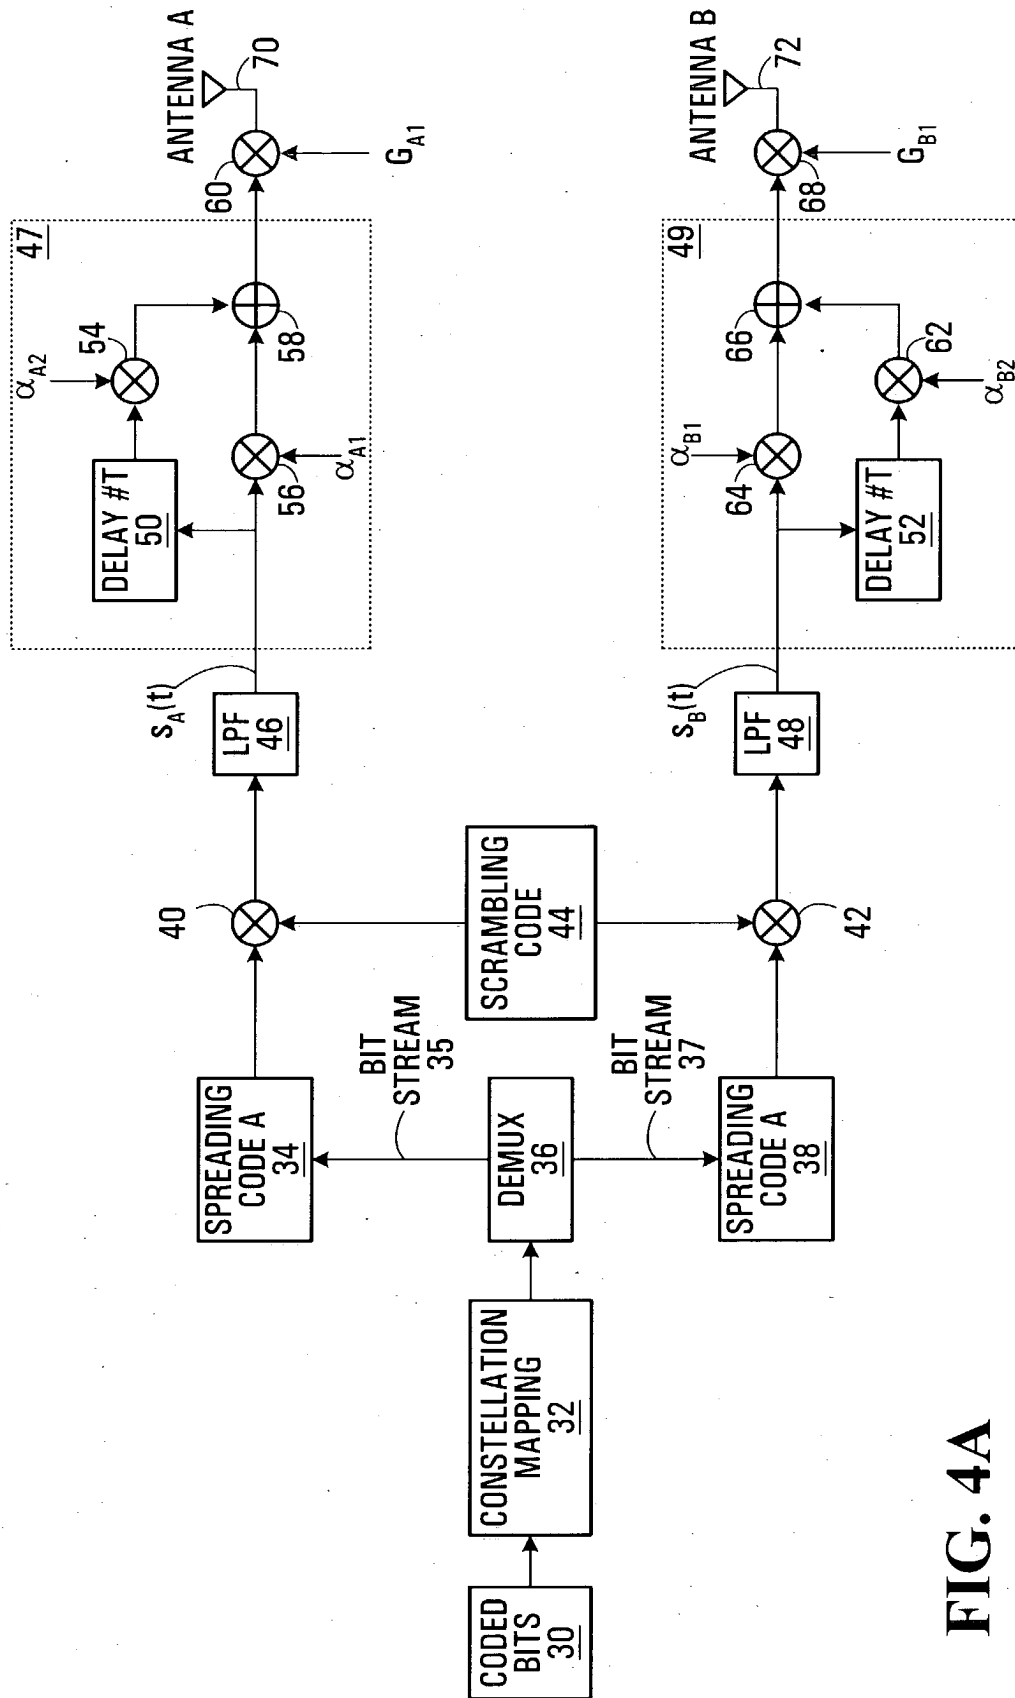
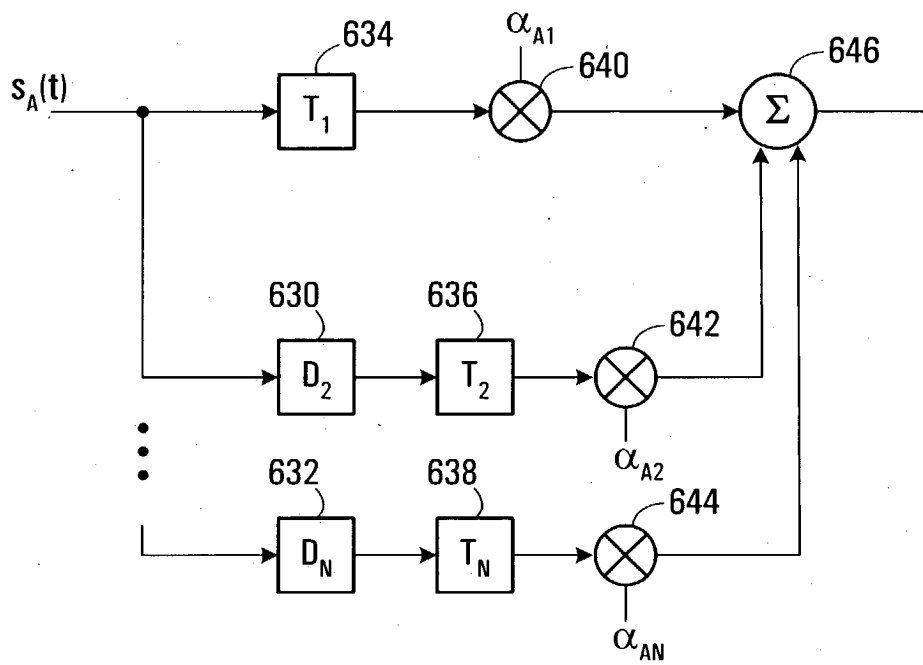


FIG. 4A

**FIG. 4B**

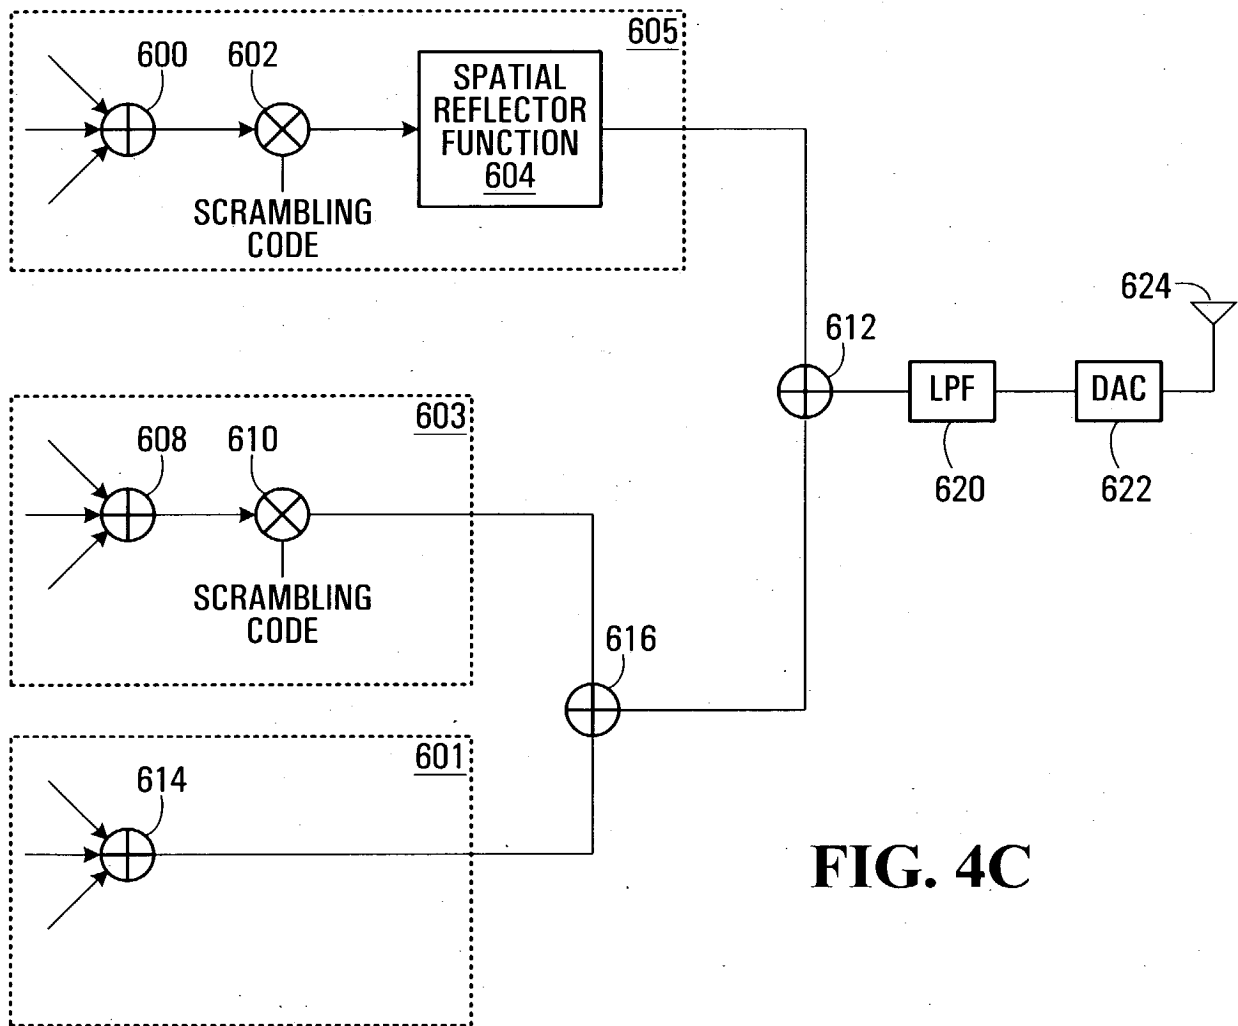


FIG. 4C

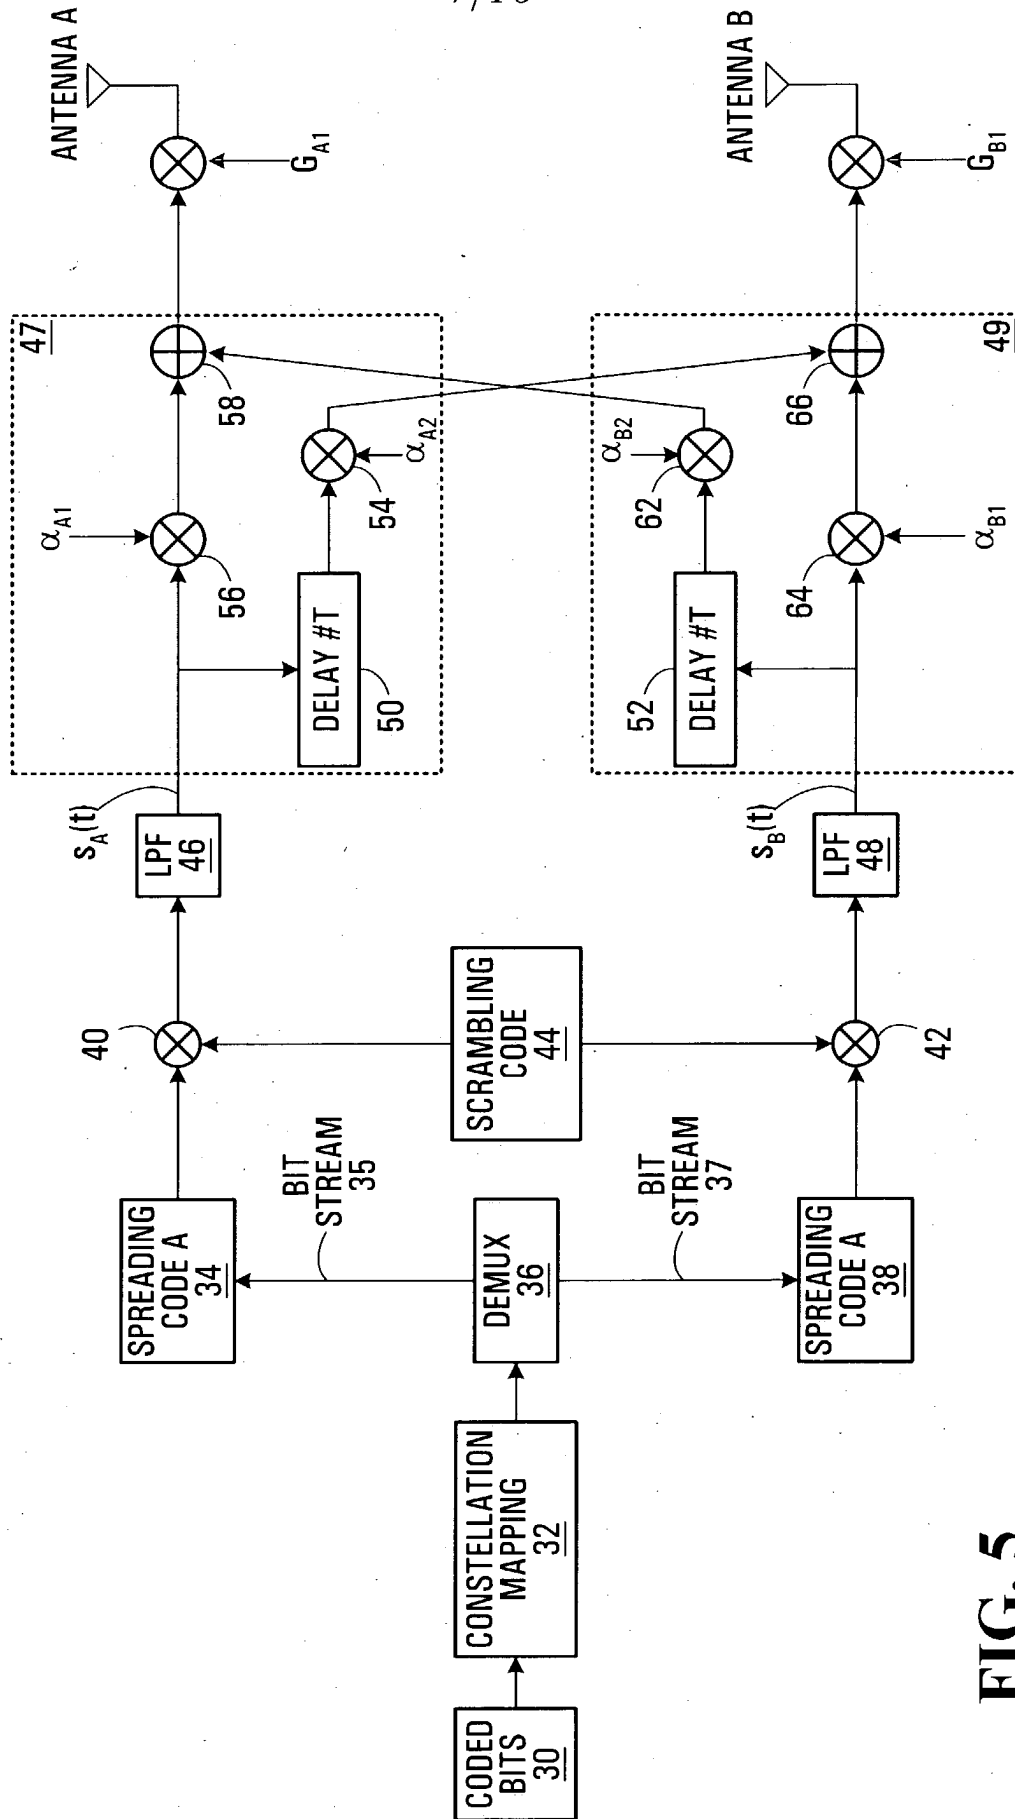


FIG. 5

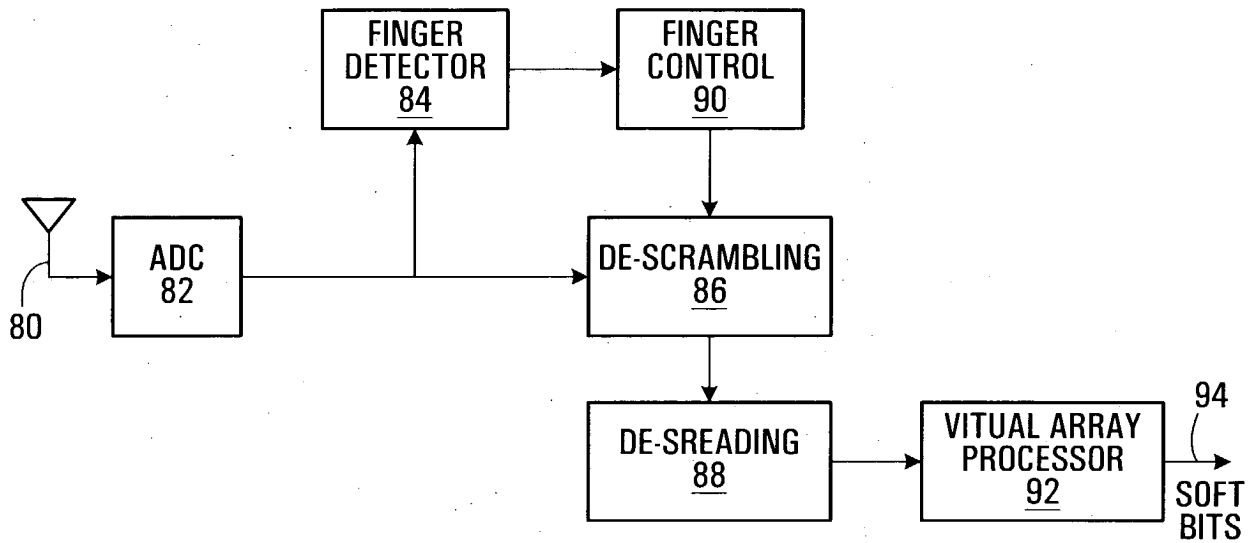


FIG. 6

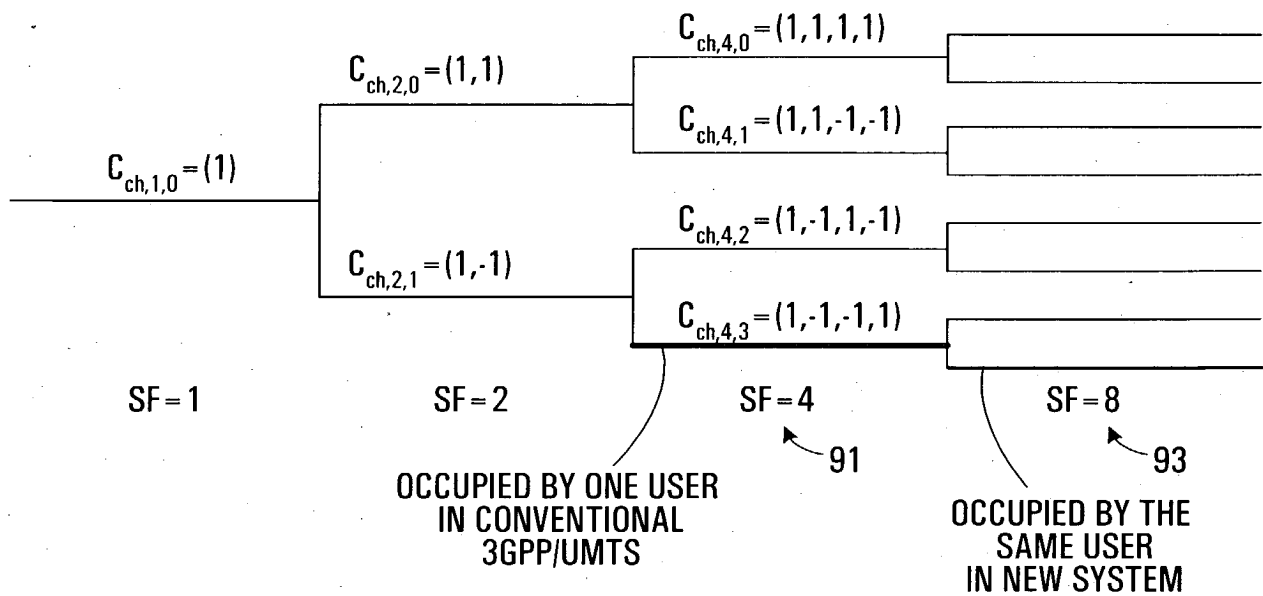


FIG. 7

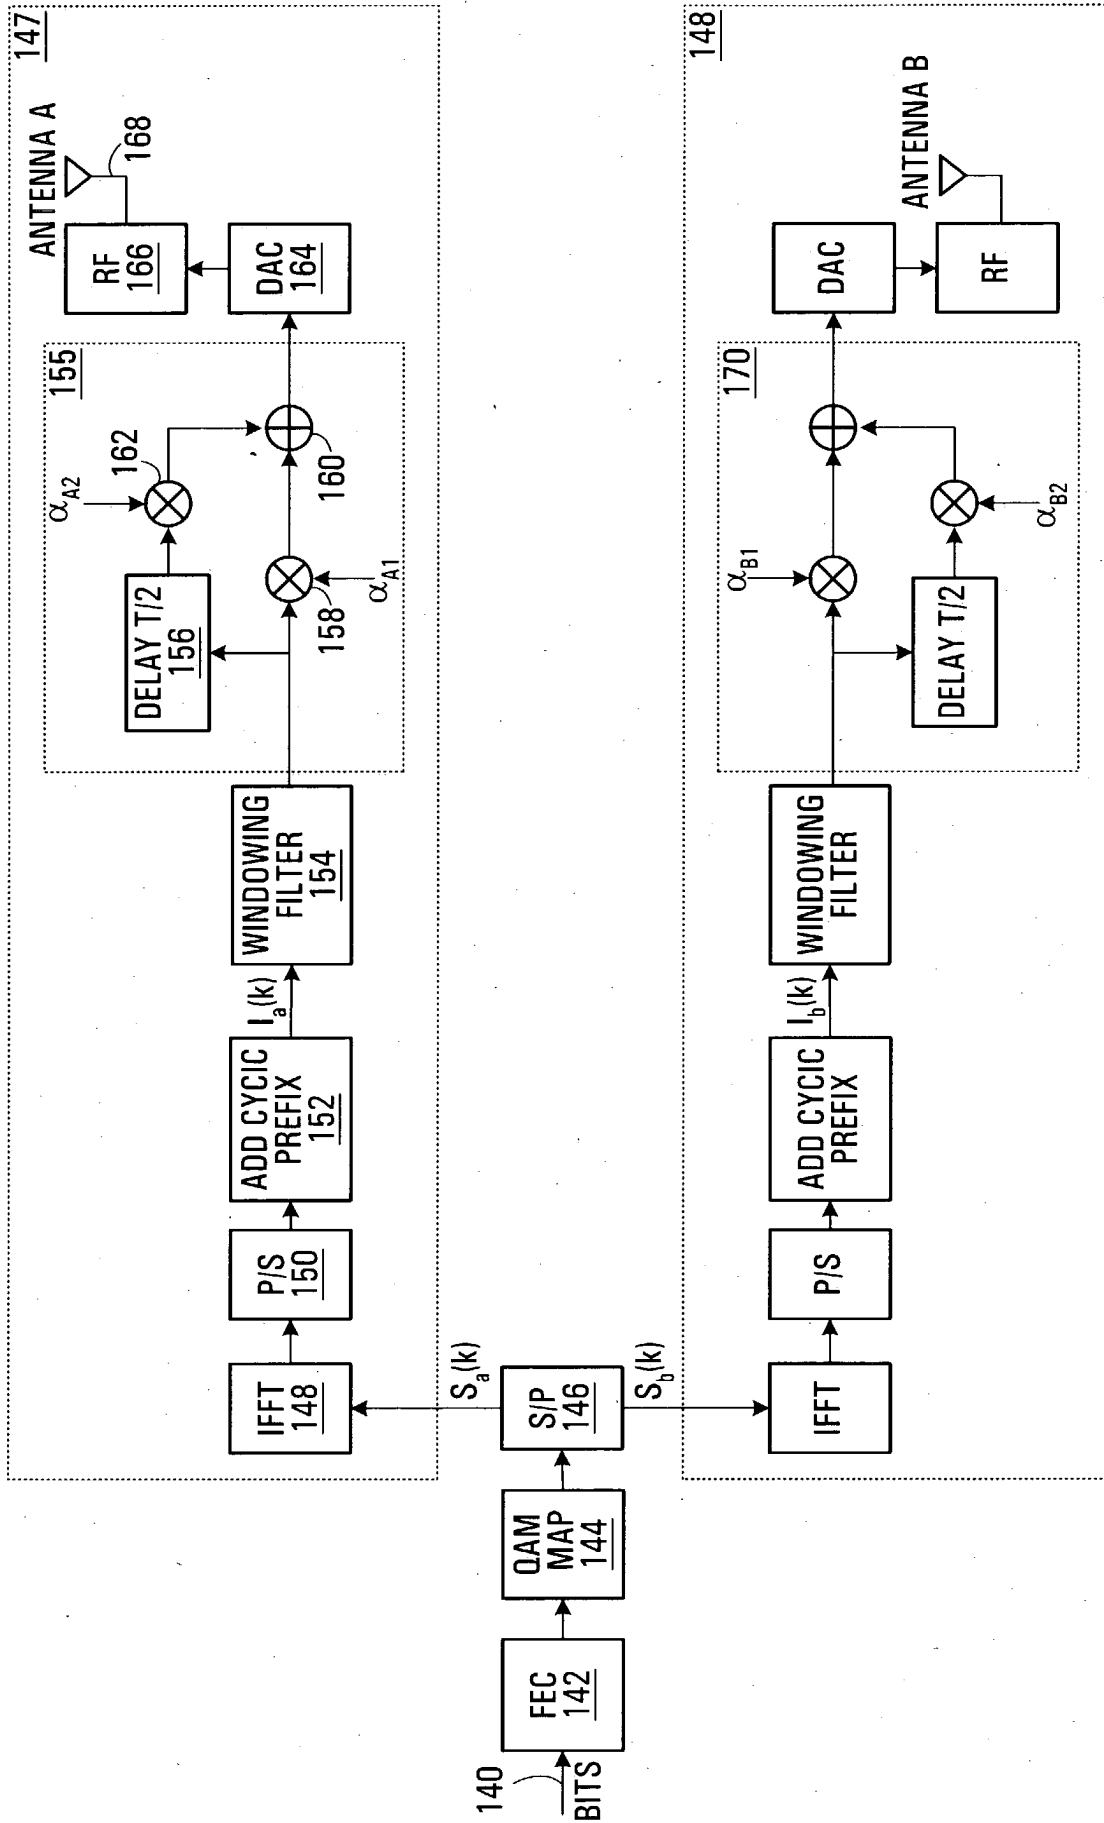


FIG. 8

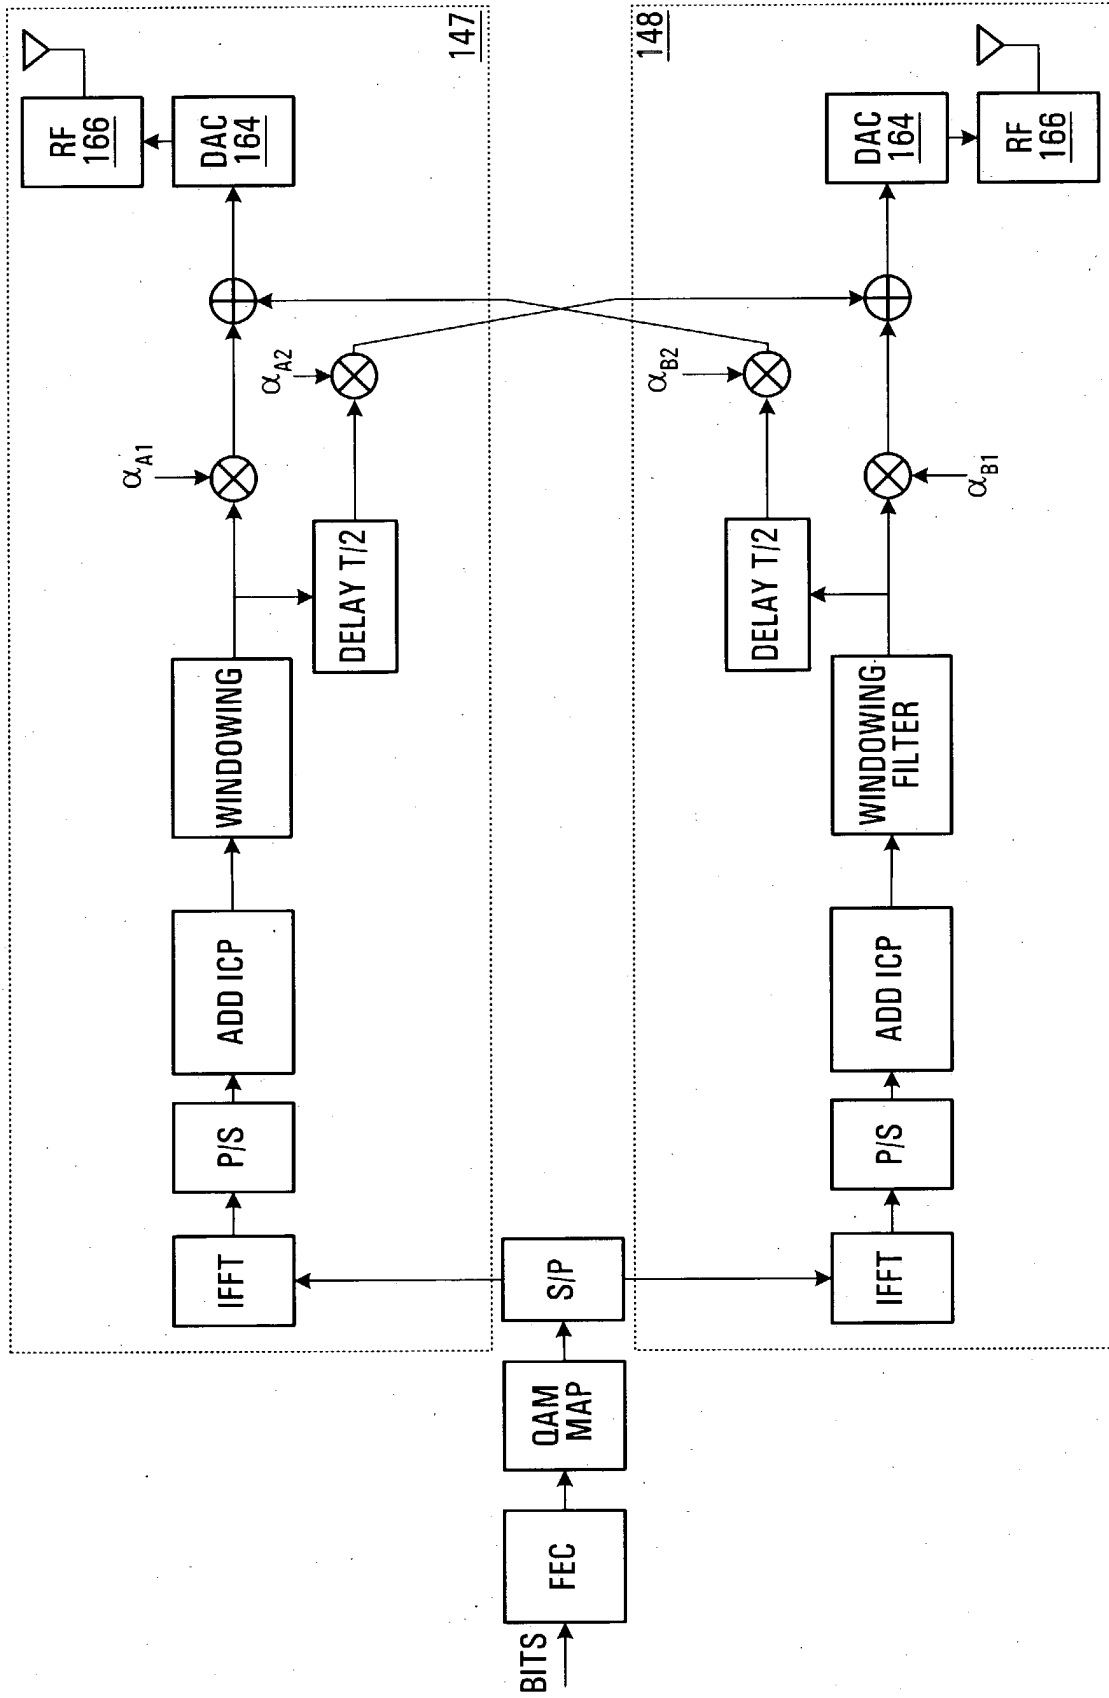


FIG. 9

11/16

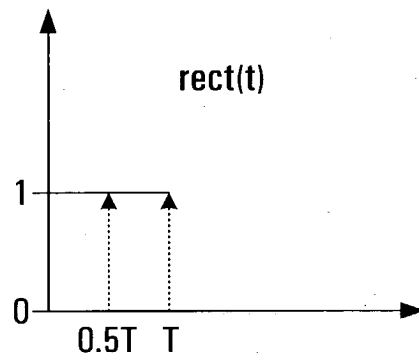


FIG. 10A

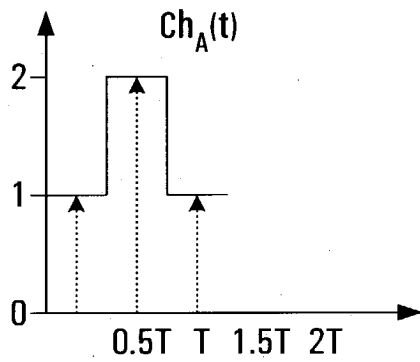


FIG. 10B

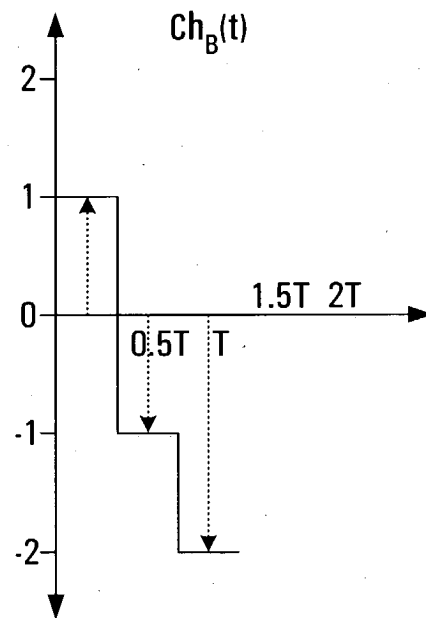


FIG. 10C

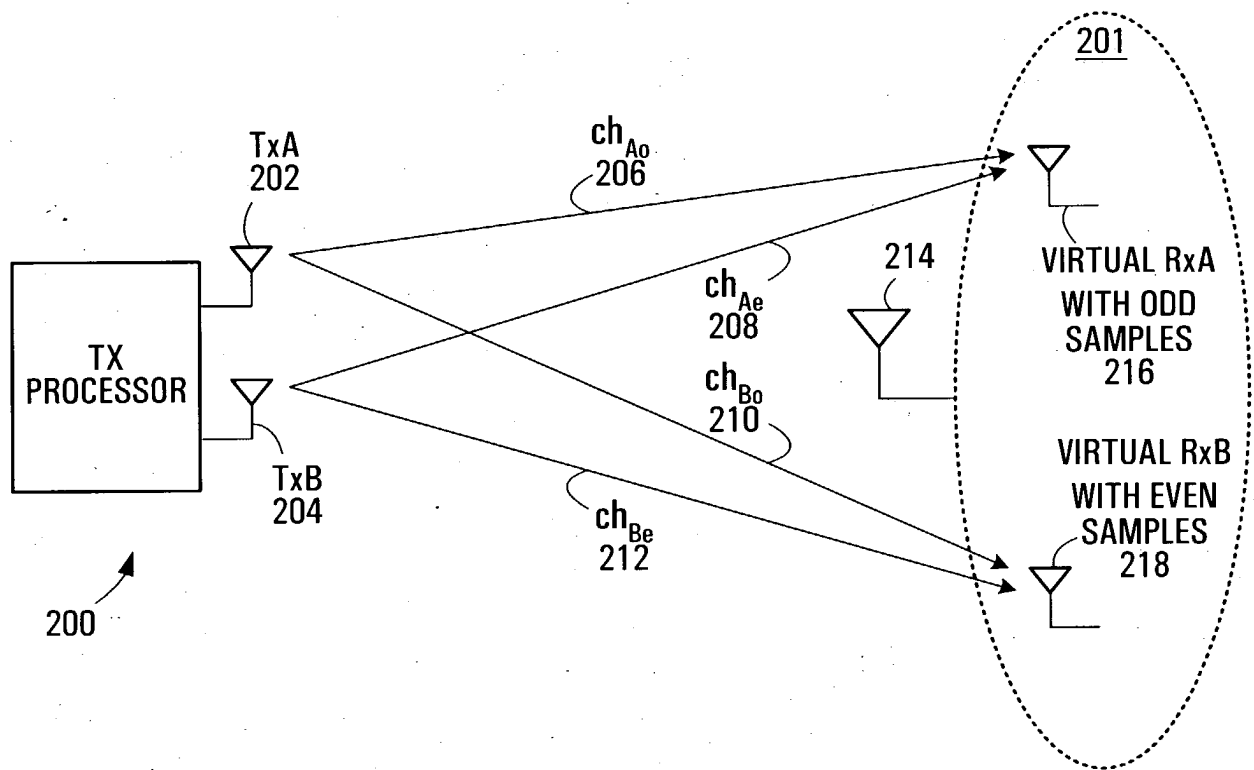


FIG. 11

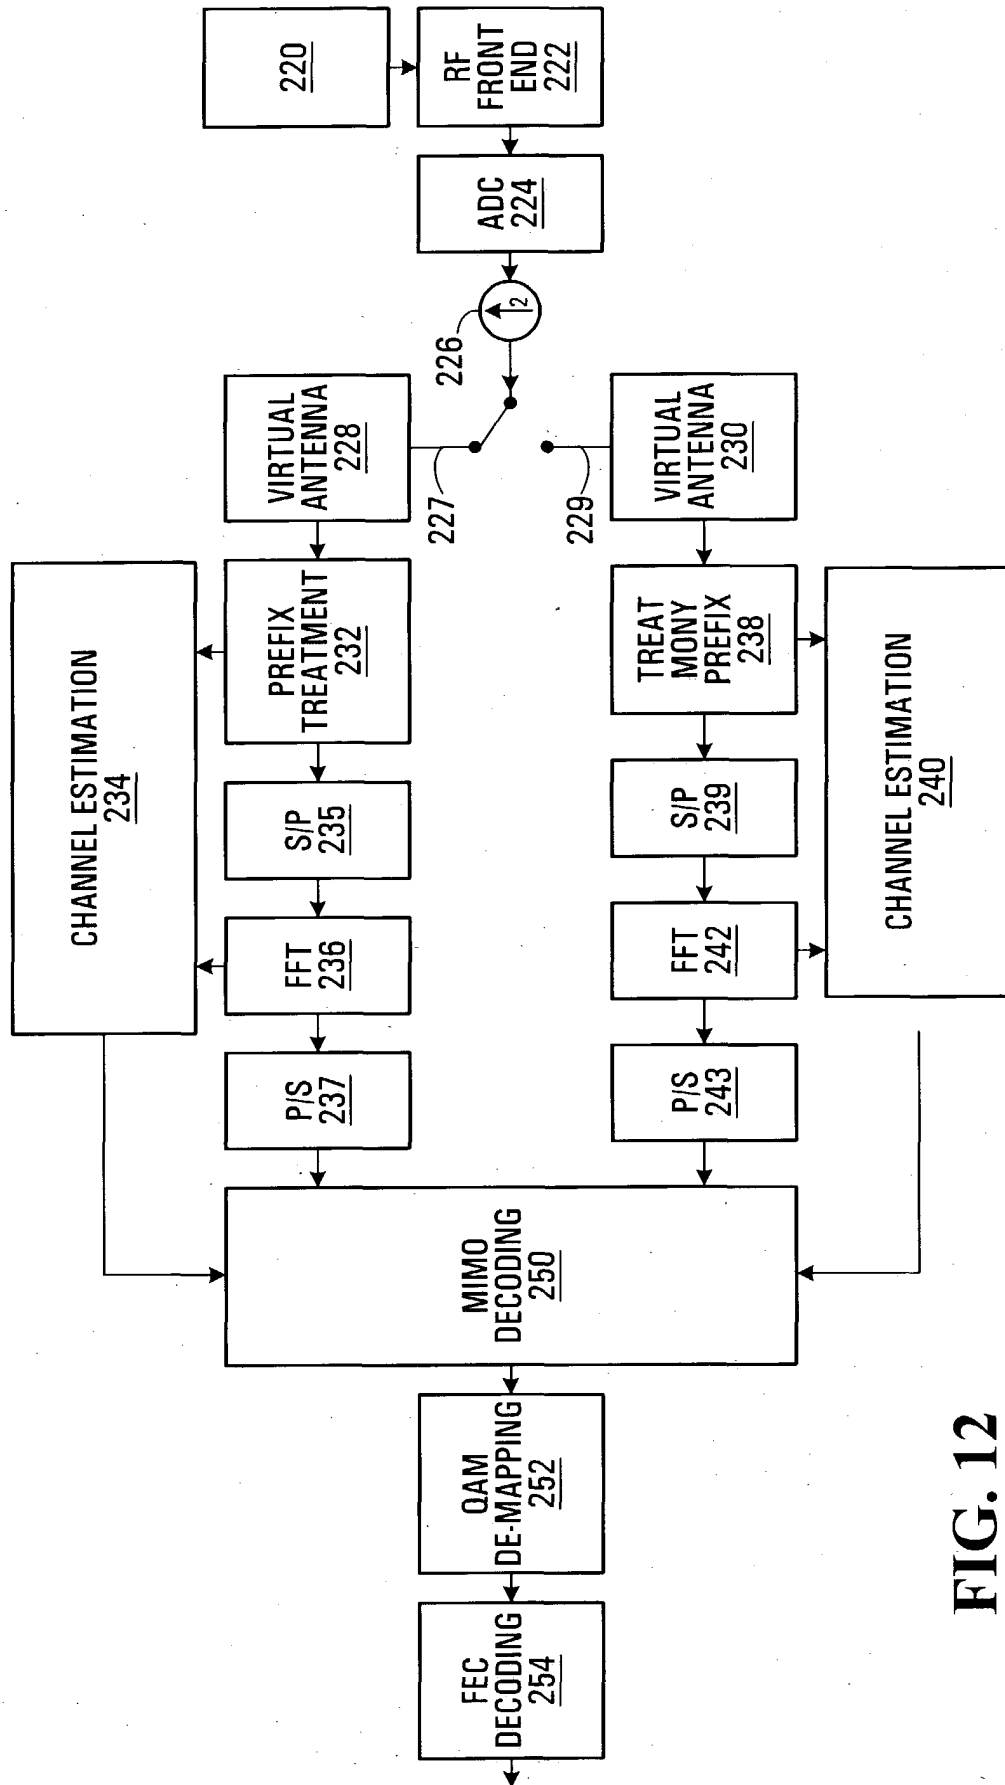


FIG. 12

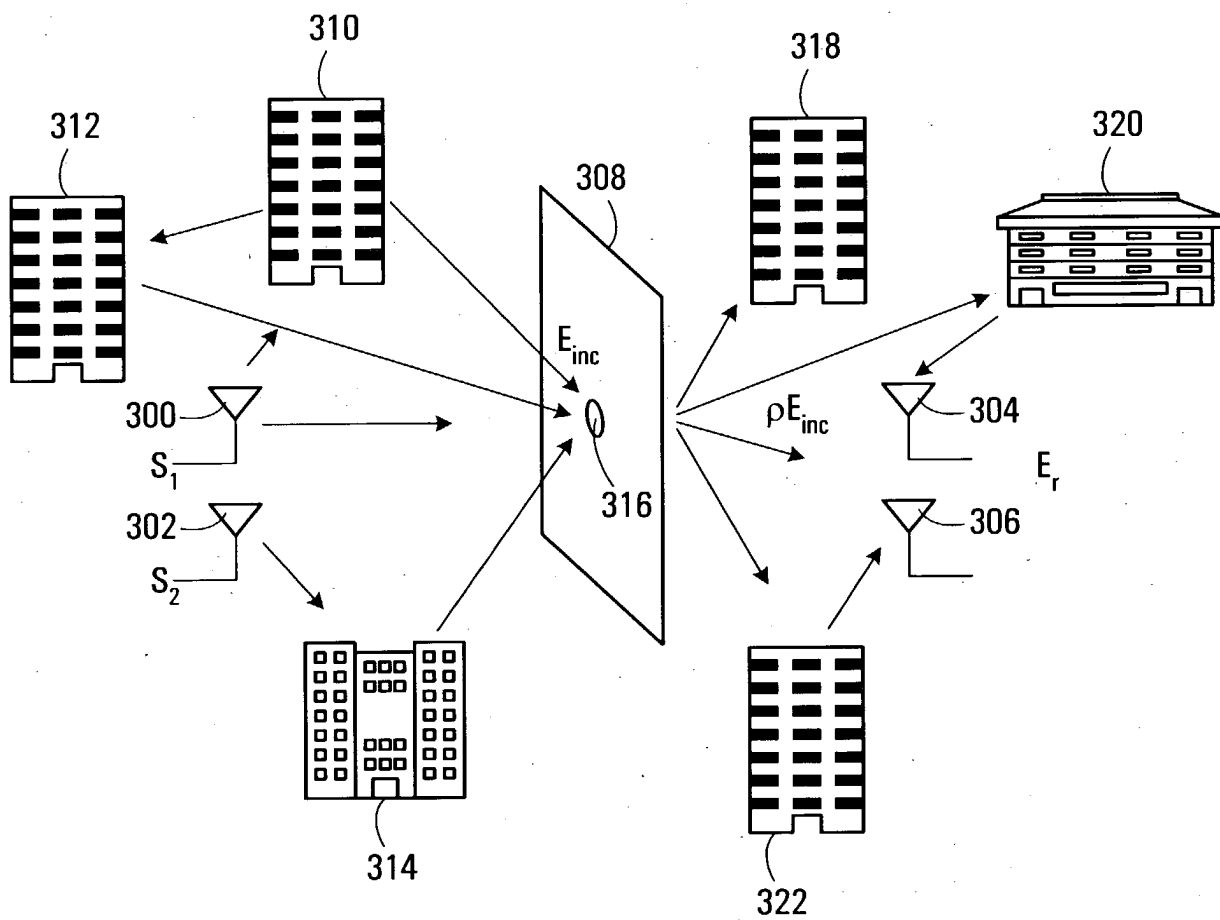


FIG. 13

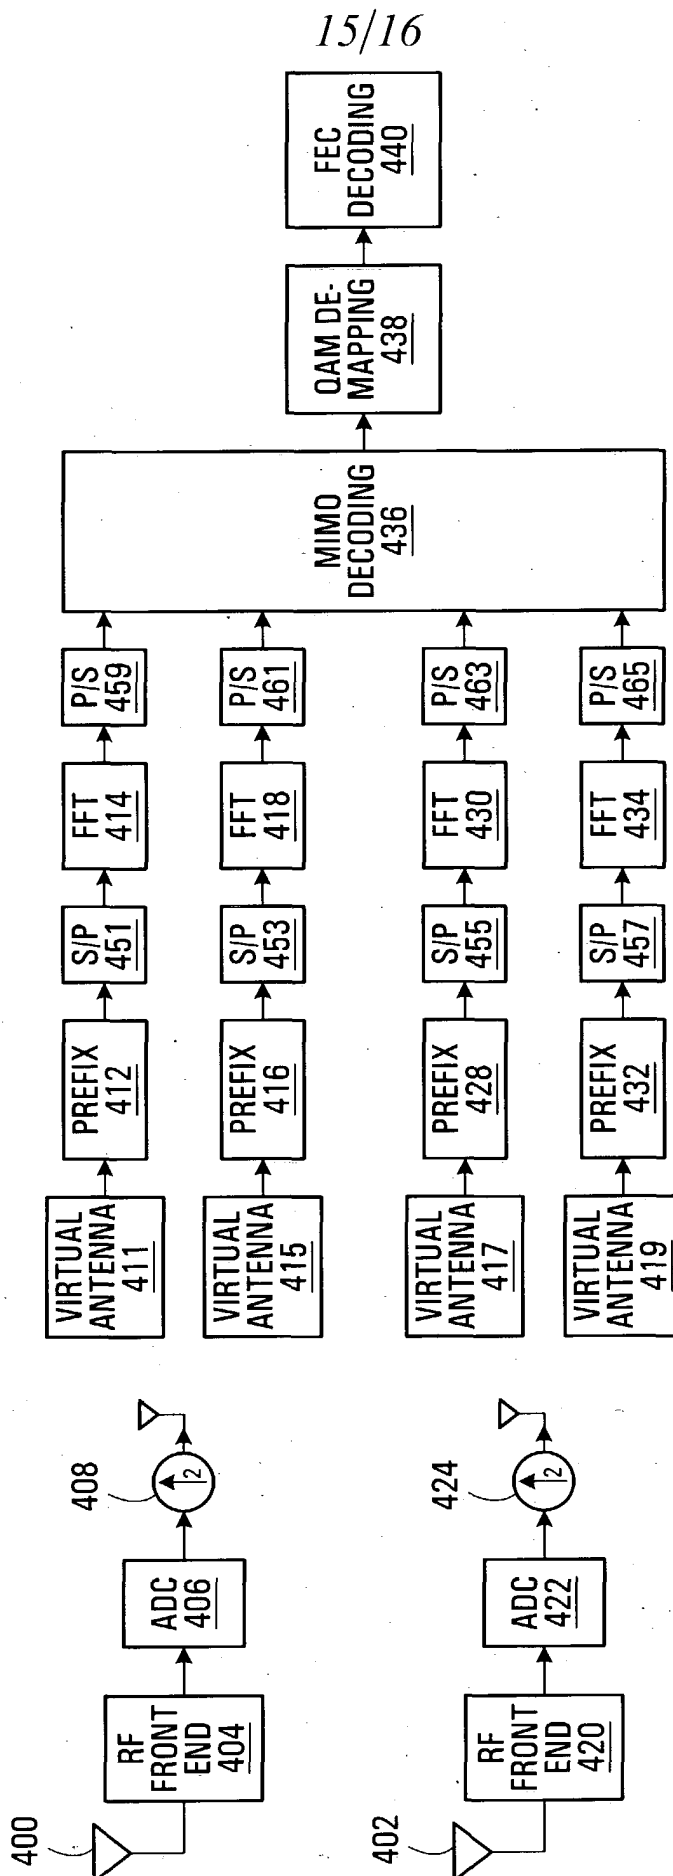


FIG. 14

+

16/16

2x2, 2x1 Embodiments vs. BLAST 2x4, 2x2, 2x1 & STTD 2x1
 RATE=1/3, VA 100km/h, Ideal Channel Estimation

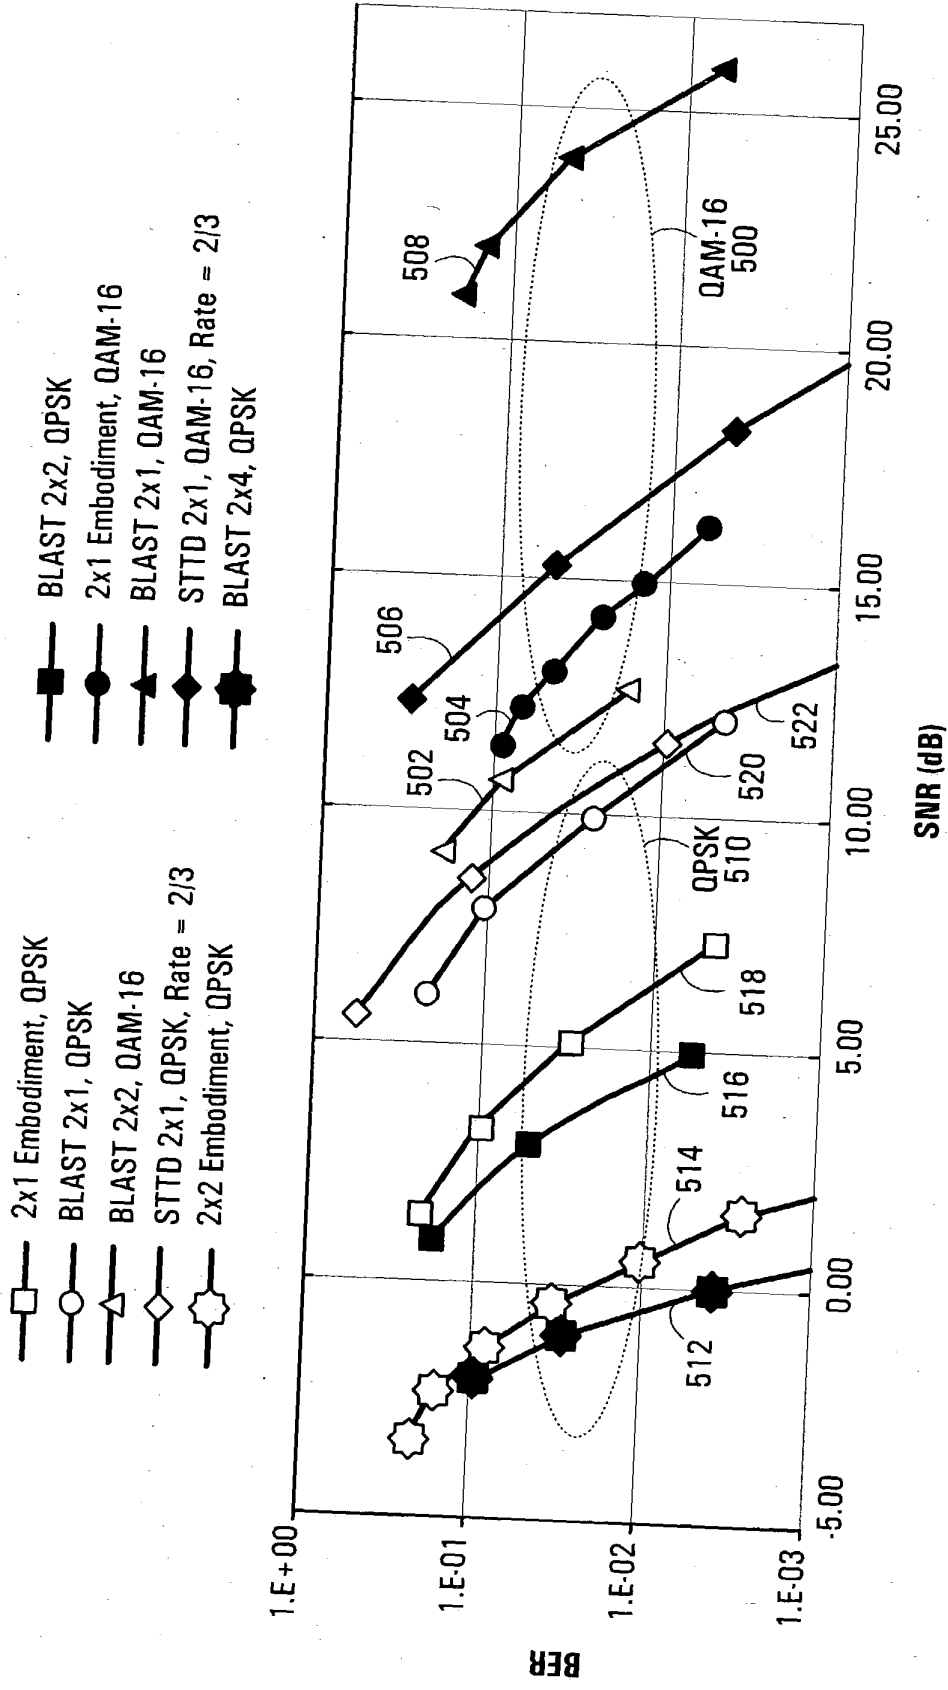


FIG. 15